

PSP

2.7Ø x 7.1 mm

Time-Lag Fuse



Agency Approvals

Agency	Ampere Rating
Recognized Component for Canada and US	500mA - 5A
PSE	1A - 5A

Interrupting Rating

50 amperes at 125V AC/DC


Product Characteristics

Operating Temperature	-55 °C to 125 °C
Material	Body: Encapsulated, Epoxy-Coated Leads Wire: Tin Plated Copper
Leads Wire	Ø.65mm

Packaging

Packaging Option	Quantity
In Bulk	3,000 pcs / box

Mechanical Dimensions (mm)

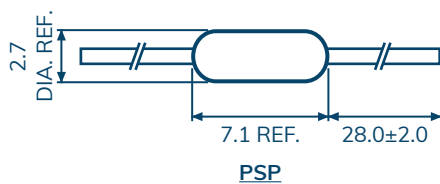

Electrical Characteristics

Ampere Rating	Opening Time	
	1 In	2 In
	MIN	MAX
500mA - 5A	4 hr	120 sec

Catalog Number	Ampere Rating (A)	Voltage Rating (V)	Nominal Cold Resistance (Ohms)	Nominal Melting I ² t (A ² sec.)
PSP .500	500mA	125V	0.2755	0.420
PSP 001	1A		0.1346	1.017
PSP 1.50	1.5A		0.0594	3.418
PSP 002	2A		0.0445	6.293
PSP 2.50	2.5A		0.0278	11.03
PSP 003	3A		0.0255	16.74
PSP 004	4A		0.0166	20.39
PSP 005	5A		0.0129	21.51