
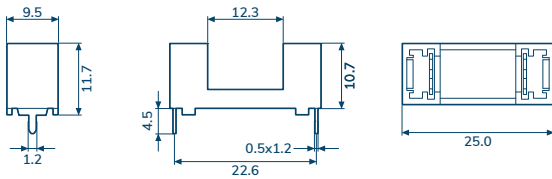


## CQ-2004

RoHS



For 5x20mm Fuse



## CQ-2005

RoHS


For 5x20mm Fuse

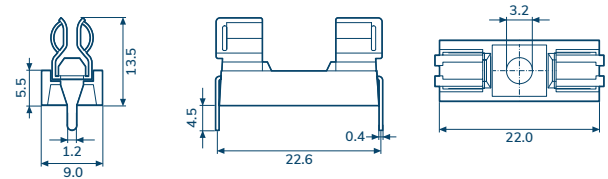

## CQ-2007

RoHS



For 5x20mm Fuse

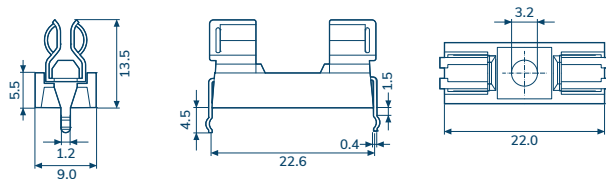

## CQ-2009



RoHS

For 5x20mm Fuse

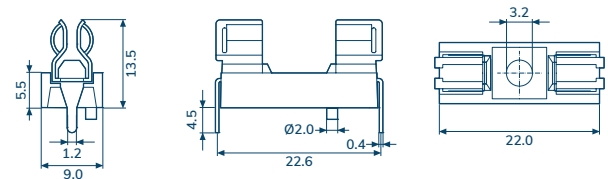



## CQ-200PT

For 5x20mm Fuse

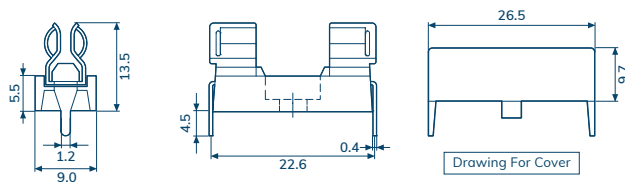

## CQ-200N

For 5x20mm Fuse

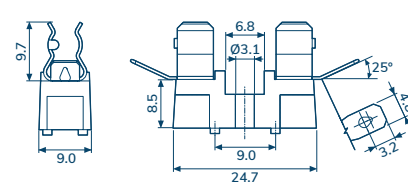

Item Number	CQ-2004	CQ-2005	CQ-2007	CQ-2009	CQ-200PT	CQ-200N
Insertion & Extraction Force	1 Kg. Min.	1Kg. Min.	1Kg. Min.	1Kg. Min.	1 Kg. Min.	1.5 Kg. Min.
Dielectric Strength For 60 Sec	AC 500V Min.	AC 2000V Min.	AC 2000V Min.	AC 2000V Min.	AC 2000V Min.	AC 2000V Min.
Suitable Rated Current	6.3A/250V	6.3A/250V	6.3A/250V	6.3A/250V	6.3A/250V	15A/250V
Insulation Resistance At500VDC	100MΩ Min	100MΩ Min	100MΩ Min	100MΩ Min	100MΩ Min	500MΩ Min
Temperature Rise	50°C Max	60°C Max	60°C Max	60°C Max	60°C Max	60°C Max
Voltage Drop	20mV Max.	15mV Max.	15mV Max.	15mV Max.	15mV Max.	15mV Max.