

AUE

10.3Ø x 38.1 mm

**RoHS****Agency Approvals**

Agency	Ampere Rating
UL Listed	500mA - 3.5A
UL Recognized	4A - 30A
Recognized Component for Canada and US	30.1A - 60A
CSA Certified	500mA - 30A

Product Characteristics

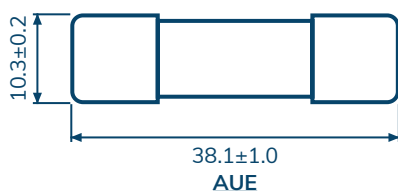
Operating Temperature	-55 °C to 125 °C
Material	Body: Glass / Caps: Nickel Plated Brass Option: Nickel Plated / Gold Plated Available
Ampere Rating	500mA to 80 A
Voltage Rating	250V and less

Electrical Characteristics

Ampere Rating	Opening Time			
	1 In	1.35 In	1.5 In	2 In
	MIN	MAX	MAX	MAX
500mA - 30A	4 hr	1 hr	-	120 sec
Above 30A	4 hr	-	1 hr	120 sec

Packaging

Packaging Option	Quantity
Bulk	150 pcs / box

Mechanical Dimensions (mm)

AUB

10.3Ø x 38.1 mm

RoHS**Product Characteristics**

Operating Temperature	-55 °C to 125 °C
Material	Body: Ceramic / Caps: Nickel Plated Brass Option: Nickel Plated Available
Ampere Rating	500mA to 80A
Voltage Rating	600V and less

Electrical Characteristics

Ampere Rating	Opening Time		
	1 In	1.35 In	2 In
	MIN	MAX	MAX
500mA - 80A	4 hr	1 hr	120 sec

Packaging

Packaging Option	Quantity
Bulk	150 pcs / box

Mechanical Dimensions (mm)