

# SEJ

10.1 x 3.1 x 3.1 mm (4012)

Time-Lag Fuse



## Agency Approvals

Agency	Ampere Rating
Recognized Component for Canada and US	1.25A
TUV	1.25A
PSE	1.25A
KTL	1.25A
CCC	1.25A

## Interrupting Rating

250 amperes at 250V AC  
 200 amperes at 280V AC  
 200 amperes at 250V AC  
 200 amperes at 63V AC  
 100 amperes at 250V DC  
 100 amperes at 125V DC  
 200 amperes at 63V DC


## Product Characteristics

<b>Operating Temperature</b>	-55 °C to 125 °C
<b>Material</b>	Body: Ceramic Termination: Gold Plated Brass Caps

## Packaging

Packaging Option	Quantity
On Tape	2,500 pcs / reel

## Mechanical Dimensions (mm)

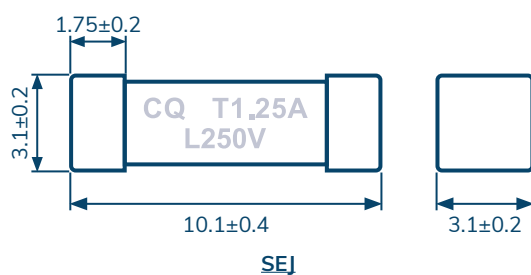

**RoHS**

## Electrical Characteristics

Ampere Rating	Opening Time			
	1.25 In	2 In	10 In	
	MIN	MAX	MIN	MAX
1.25A	60 min	120 sec	10 ms	100 ms

Catalog Number	Ampere Rating (A)	Voltage Rating (V)	Nominal Cold Resistance (Ohms)	Nominal Melting I <sup>2</sup> t (A <sup>2</sup> sec.)
SEJ 1.25	1.25A	250V	0.105	4.52