



Conquer in-line fuse holders are easy removal and adopted for varies of circuits applications, easy to inspect and change fuses. The waterproof feature for exposed locations and harsh environments.

- Contact : brass, Tin / Nickel plated
- With other wire size or lengths available on special order.
- To install fuses with “loop” type wires, simply cut loop into two separate wires of desired length.


CQ-209F3 RoHS
For 6.3x30/6.3x32mm Fuses
Hinged Body Type

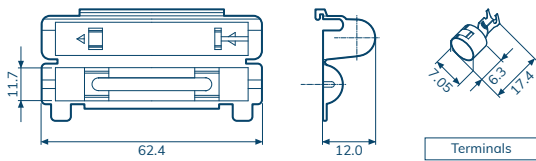


CQ-209F4 RoHS
For 6.3x30/6.3x32mm Fuses
Hinged Body Type

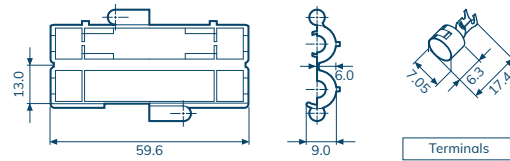


CQ-210
For 6.3x30/6.3x32mm Fuses
Screw Type

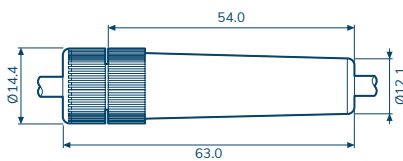


CQ-209P
For 6.3x30/6.3x32mm Fuses
Bayonet Type

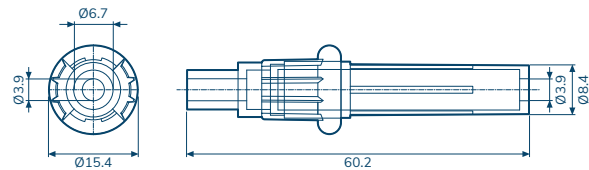

CQ-209V
For 6.3x30/6.3x32mm Fuses
Heavy Duty Bayonet Type

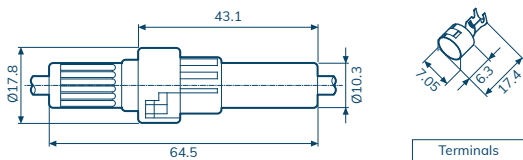

CQ-211SN RoHS
For AST Blade Type Fuses
Hinged Body Type

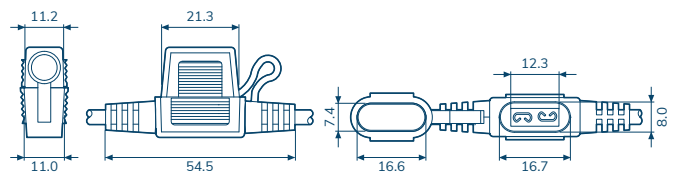

Item Number	CQ-209F3	CQ-209F4	CQ-210	CQ-209P	CQ-209V	CQ-211SN
Rated Current	15A	20A	20A	5A	40A	30A
Insulation Resistance At 500VDC	100MΩ Min	100MΩ Min	100MΩ Min	100MΩ Min	100MΩ Min	100MΩ Min
Contact Resistance	5mΩ At 1A DC	5mΩ At 1A DC	5mΩ At 1A DC	5mΩ At 1A DC	5mΩ At 1A DC	5mΩ At 1A DC
Dielectric Strength For 60 Sec	AC1500V Min.	AC1500V Min.	AC2000V Min.	AC1000V Min.	AC2000V Min.	AC1000V Min.
Body Material	Nylon	Nylon	Bakelite	P.P.	Nylon With Fiber Glass	P.V.C.
Supply Standard UL Wire-AWG/Length	16#AWG / 8"Loop	12#AWG / 8"Loop	12#AWG / 8"Loop	18#AWG / 8"Loop	12#AWG / 8"Loop	12#AWG / 10"Loop